


Glass fibre braided sleeving with acrylic coating

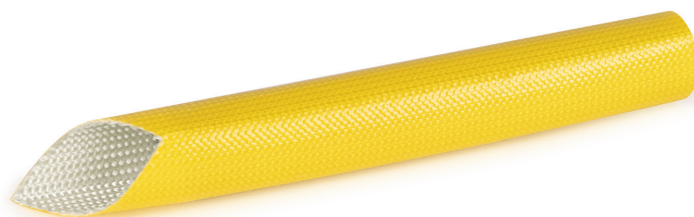

CHARACTERISTICS

- Temperature class : F
- Continuous working temperature : from -30°C to +155°C. Peaks at 180°C (few hours)
- Dielectric strength : 3kV to 7kV
- Halogen free
- Good mechanical resistance
- Good compatibility with same class impregnation varnishes
- Good behaviour with soldering iron
- Good resistance to fray
- Watertight
- Very flexible
- Good resistance to oils at +80°C (according to UL 1441)

STANDARDS*

- Compliant with RoHS directive
- Compliant with Reach regulation
- EN (CEI) 60684-3 sheets 403 at 405 (12/2002)
- EN 60684-1 (10/2003)
- EN 60684-2 (07-2012)

COLOURS AND PACKAGINGS

- Manufactured diameters : From 0.5 to 26 mm
- Standard colour : Yellow
- Other colours : green, blue, red, black, white

Standard packaging :

- Diameter 0.5 to 4.5 mm : 200 m
- Diameter 5 to 16 mm : 100 m
- Diameter 18 to 26 mm : 50 m

APPLICATIONS



Inner diameter (mm)	0.5	0.8	1	1.5	2	2.5	3	3.5	4	5	6	7	8	9	10	12	14	16	18	20	22	24	26
Tolerance inner diameter (± mm)	0.1	0.1	0.15	0.15	0.2	0.2	0.2	0.25	0.25	0.25	0.25	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.6	0.6	0.6	0.7	0.7

* I nostri prodotti soddisfano in tutto o in parte i requisiti per gli standard sopra menzionati. Le informazioni tecniche scritte sulle nostre schede tecniche corrispondono alle più recenti conoscenze di cui disponiamo su quei prodotti, ma l'utente non è esentato dalla verifica delle prestazioni nel reale particolare contesto di applicazione.